



THIS STANDARD SHOWS THE WARNING LABEL REQUIREMENTS FOR THE SMALL WIND SERVICE PANEL.

SERVICE PANEL COVER

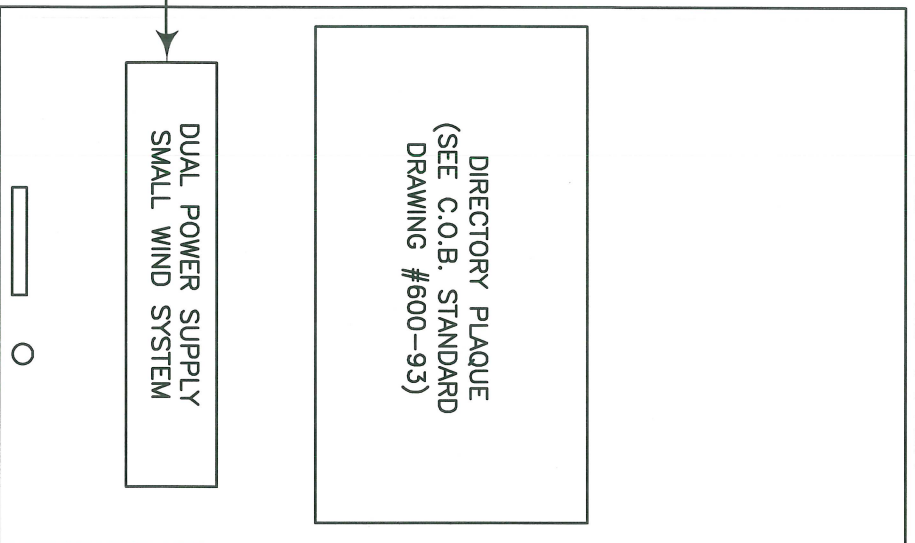

INSIDE SERVICE PANEL

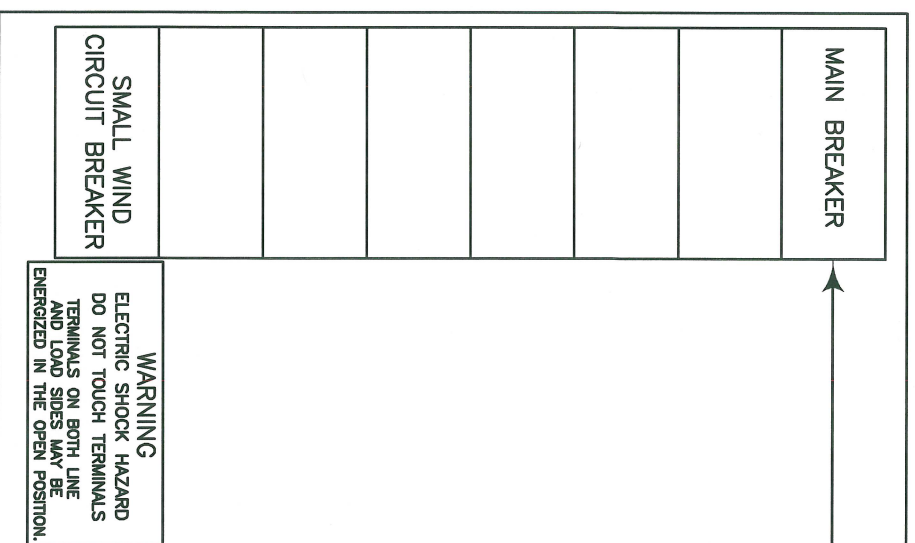

MAIN BREAKER AND SMALL WIND CIRCUIT BREAKER SHALL BE IN THE FARTHEST POSITION FROM EACH OTHER IN SERVICE PANEL

WARNING LABEL SHALL BE NEXT TO OR JUST BELOW THE SMALL WIND CIRCUIT BREAKER

NOTES:

1. LABELS SHALL BE PLACED IN CLEAR VIEW ON ELECTRICAL EQUIPMENT WITHOUT COVERING MANUFACTURER LABELING.
2. PLAQUES SIZE SHALL NOT BE SMALLER THAN 2"x5" AND NO LARGER THAN 3"x6". (WITH EXCEPTION OF THE DIRECTORY PLAQUE)
3. FONT STYLE SHALL BE ARIAL AND FONT SIZE SHALL NOT BE SMALLER THAN SIZE 12 AND NO LARGER THAN SIZE 28.
4. PLAQUES SHALL BE RED WITH WHITE LETTERING.
5. SIGNS SHOULD BE OF SUFFICIENT DURABILITY TO WITHSTAND THE ENVIRONMENT. ALL PLAQUES SHALL BE PERMANENTLY ATTACHED TO SURFACE OF ELECTRICAL EQUIPMENT BY MEANS OF EPOXY, SCREWS, OR RIVETS. OUTDOOR SIGNS SHALL BE EITHER METAL OR PLASTIC WITH ENGRAVED OR MACHINE-PRINTED LETTERS.



REVISED: 04/28/2011

APPROVED:

*11-7-11*

STANDARD DRAWINGS

SMALL WIND SERVICE PANEL WARNING LABELS

SD

600-92